



AFRL-RW-EG-TR-2017-030

**Agile Robust Autonomy: Inspired by
Connecting Natural Flight and Biological
Sensors**

Jennifer Talley, PhD

**Department of the Air Force
Air Force Materiel Command
AFRL—Eglin Research Site
101 West Eglin Blvd
Eglin AFB FL, 32542-6864**

March 2017

Period of Performance: November 2013–September 2016

DISTRIBUTION A—Approved for public release: distribution unlimited. (96TW-2017-0169)

See Inside “NOTICE AND SIGNATURE” Page for Data Rights Restrictions

**AIR FORCE RESEARCH LABORATORY
MUNITIONS DIRECTORATE**

■ Air Force Materiel Command

■ United States Air Force

■ Eglin Air Force Base, FL 32542

DISTRIBUTION A

NOTICE AND SIGNATURE PAGE

Using Government drawings, specifications, or other data included in this document for any purpose other than Government procurement does not in any way obligate the U.S. Government. The fact that the Government formulated or supplied the drawings, specifications, or other data does not license the holder or any other person or corporation; or convey any rights or permission to manufacture, use, or sell any patented invention that may relate to them.

Qualified requestors may obtain copies of this report from the Defense Technical Information Center (DTIC) <<http://www.dtic.mil/dtic/index.html>>.

AFRL-RW-EG-TR-2017-030 HAS BEEN REVIEWED AND IS APPROVED FOR PUBLICATION IN ACCORDANCE WITH ASSIGNED DISTRIBUTION STATEMENT.

FOR THE DIRECTOR:

//SIGNED//

//SIGNED//

JENNIFER TALLEY, DR-II
AFRL/RWWI Program Manager

TIMOTHY J. KLAUSUTIS, DR-IV, PhD
Terminal Seeker Science CTC Lead

This report is published in the interest of scientific and technical information exchange, and its publication does not constitute the Government's approval or disapproval of its ideas or findings.

REPORT DOCUMENTATION PAGE				Form Approved OMB No. 0704-0188	
Public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing this collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden to Department of Defense, Washington Headquarters Services, Directorate for Information Operations and Reports (0704-0188), 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to any penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number. PLEASE DO NOT RETURN YOUR FORM TO THE ABOVE ADDRESS.					
1. REPORT DATE (DD-MM-YYYY)		2. REPORT TYPE		3. DATES COVERED (From-To)	
01-03-2017		Final		20-11-2013-30-09-2016	
4. TITLE AND SUBTITLE Agile Robust Autonomy: Inspired by Connecting Natural Flight and Biological Sensors				5a. CONTRACT NUMBER	
				FA8651-12-D-0043	
				5b. GRANT NUMBER	
6. AUTHOR(S) Jennifer Talley, PhD				5c. PROGRAM ELEMENT NUMBER	
				N/A	
				5d. PROJECT NUMBER	
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) Department of the Air Force Air Force Material Command AFRL—Eglin Research Site 101 West Eglin Blvd Eglin AFB FL, 32542-6864				N/A	
				5e. TASK NUMBER	
				N/A	
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES) Department of the Air Force Air Force Material Command AFRL—Eglin Research Site 101 West Eglin Blvd Eglin AFB FL, 32542-6864				5f. WORK UNIT NUMBER	
				W0PY	
				8. PERFORMING ORGANIZATION REPORT NUMBER	
10. SPONSOR/MONITOR'S ACRONYM(S)				N/A	
				AFRL/RWWI	
11. SPONSOR/MONITOR'S REPORT NUMBER(S)				AFRL-RW-EG-TR-2017-030	
12. DISTRIBUTION/AVAILABILITY STATEMENT DISTRIBUTION A—Approved for public release: distribution unlimited. (96TW-2017-0169)					
13. SUPPLEMENTARY NOTES Distribution Statement indicating authorized access is on the cover page and block 12 of this form. Data rights restrictions and availability of this report are shown on the Notice and Signature page. Report contains color.					
14. ABSTRACT The goal of research conducted under work unit W0PY was to understand insect flight for purposes of improving agility, autonomy, robustness, and integrated sensing and processing of unmanned aerial vehicles. This goal was approached using a comparative methodology in order to understand general principles of insect flight across diverse species; understand environmental variables that impact natural flight of insects; understand how insects can recover from flight perturbations; and understand the connection between flight, sensor capability, neural processing, and muscular control.					
15. SUBJECT TERMS autonomy, behavior, biology, insect					
16. SECURITY CLASSIFICATION OF:			17. LIMITATION OF ABSTRACT	18. NUMBER OF PAGES	19a. NAME OF RESPONSIBLE PERSON
a. REPORT	b. ABSTRACT	c. THIS PAGE			JENNIFER TALLEY
UNCLASSIFIED	UNCLASSIFIED	UNCLASSIFIED	SAR	30	19b. TELEPHONE NUMBER with area code
					(850) 883-0862

Standard Form 298 (Rev. 8-98)
Prescribed by ANSI Std. Z39.18

DISTRIBUTION A

THIS PAGE INTENTIONALLY LEFT BLANK

TABLE OF CONTENTS

Section	Page
1.0 SUMMARY	10
2.0 INTRODUCTION	10
3.0 2014 Annual Report	10
4.0 2015 Annual Report	14
4.1 Stabilization of the head in flight.....	14
4.2 High-speed Recordings of Natural Flight during Very Low Light Conditions	21
4.3 Challenges to Auto-Tracking Insects.....	21
5.0 2016 Annual Report	24
5.1 Outdoor Completely Natural Flight Capture	24
5.2 Gaze Stabilization of Tethered Damselflies	26
5.3 Electroretinography (ERG) of Damselfly	27
5.4 Compound Eye Resolution of Damselfly	30
6.0 REFERENCES	31

LIST OF FIGURES

Figure	Page
1. Early tracking results illustrating the difficulty in tracking a small, <i>not</i> highly contrasted, unmarked flying insect against a background with changing contrast in an automated (or semi-automated way). A) Screen Capture of automated tracking program. B) Trajectory of tracked flying insect in one camera view.	11
2. Outdoor recording screenshot of local robberfly (<i>Diogmites</i>) after capture. Lighting conditions are challenging because of changing weather conditions. The sky is used as a background in an attempt to increase the contrast of the insect and background, The robberfly is directly above the release point in this screenshot.	12
3. Damselfly gaze stabilization setup. Panel field of view = 45 x 22.5 degrees. Local species of damselflies, robberflies, and dragonflies have all been tested in this apparatus and have failed to respond with head rotations.	13
4. Head of a damselfly showing compound eyes and ocelli clearly. B) Tethered damselfly.	14
5. Visible wide field of view projector for stimulation of gaze stabilization response in insects. Field of view = 240 x 120 degrees.	15
6. Initial stimulation for damselflies in dome with field of view = 240 x 120 degrees.	15
7. Designation of reference frame for visual stimulation.	16
8. Tethered damselfly in the dome, screenshot of a high-speed recording. Lines illustrate desired measurements.	16
9. Radius of blacked-out center is enlarged until animal stops responding. A) Less than 140 degrees, animal still responds with head rotation. B) At radius of 140 degrees, animal stops responding. [not to scale]	17
10. Radius of blacked-out “cone” is enlarged until animal stops responding. A) Greater than 155 degrees, animal still responds with head rotation. B) At radius of 155 degrees, animal stops responding.	18
11. Ring of stimulation sufficient and necessary for head movement response to rotating horizon.	18
12. Hypotheses to explain behavioral response. A) Both the speed of the horizon and the spatial extent of the horizon movement change from the center to the edges. B) The field of view that stimulates the gaze stabilization circuit is in the periphery and not in the center. C) The intensity is decreased when areas are blacked out, and the animal stops responding when intensity it too low.	19
13. Testing hypotheses to explain behavioral response. A) Response zone will shift to match a particular rotation speed or spatial displacement of the horizon line. B) The field of view that stimulates the gaze stabilization circuit remains stable as center is shifted. C) The response zone will change size based on total intensity of the scene.	20
14. High-speed videography setup attempt at night collecting station.	21

15. The scene consists of a floor and tabletop along with a moving, 1 cm cube which represents the flying insect. The cube's trajectory consists of 5, 200-frame segments.	22
16. Graphical Calibration Error Results.....	23
Projected relationships between position error (measured) and observation distance and pixels on target (user defined).....	23
18. Natural outdoor flight recording setup	24
19. Damselflies in natural flight outdoors with complex and changing background due to wind. Screenshot of high-speed recording.	25
20. Auto-tracking example of outside flight recordings of damselflies. Movement over five frames. The blue is where the insect is now; red is where it was five frames ago. .	26
21. Dome visual stimulation for damselflies. Teal is used to block out the rotating horizon line.	27
22. Analysis of voltage response using electroretinography recording of damselfly compound eye.....	28
23. ERG recordings from the damselfly to spectral light in addition to a green LED. One green light LED recording was taken after each spectral measurement.....	29
24. KHILS Projector Spectral Characteristics. A) Ocean spectrometer measurement of the projected sky in KHILS bio-dome. B) Ocean spectrometer measurement of the projected ground in KHILS bio-dome.	29
25. Measure ommatidial lens array with FACETS.....	30

LIST OF TABLES

Table		Page
1.	Degree responses of individuals tested with black and teal bounds.	29

1.0 SUMMARY

The goal of research conducted under work unit W0PY was to understand insect flight for purposes of improving agility, autonomy, robustness, and integrated sensing and processing of unmanned aerial vehicles. This goal was approached using a comparative methodology in order to understand general principles of insect flight across diverse species; understand environmental variables that impact natural flight of insects; understand how insects can recover from flight perturbations; and understand the connection between flight, sensor capability, neural processing, and muscular control.

2.0 INTRODUCTION


Insects are existence proofs for agile, robust, autonomous flight that minimizes size, weight, and power requirements, aspects that are desirable for human-engineered systems. To learn design principles for improved sensors and guidance/control algorithms, AFRL studies insect sensors and flight. The current research effort attempts to connect the environmental information with insect flight and relate that to insect sensors and processing. The goal is to understand insect flight for purposes of improving agility, autonomy, robustness, and integrated sensing and processing of unmanned aerial vehicles.

3.0 2014 ANNUAL REPORT

Indoor laboratory and outdoor laboratory flights of insects were recorded by high-speed cameras with frame rates from 500–1000 Hz. Indoor laboratory flights were recorded in a flight chamber measuring 2 m x 1 m x 1 m and lined with different optic flow patterns. Outdoor laboratory flights were recorded by releasing just captured insects in front of high-speed cameras and allowing them to initiate escape flight. The goal was to compare the kinematics of each flight inside the laboratory versus outside in the natural world. This effort required automating the tracking of the insect in the video frames because the dataset captured is extremely large. If using just two cameras recording at 1000 frames per second, the study cameras are capable of recording 8 seconds of data. The insect's position would need to be found and recorded in 16000 frames for one behavior capture.

David Forester (in-house contractor) started work automating this process based on Ty Hedrick's algorithms (Hedrick, 2008). Figure 1 illustrates challenges in adapting these techniques indoors. Also shown in Figure 1 are early behavior recordings of Green Darner dragonflies (*Anax junius*) in this flight chamber by Kaitlin Fair. Kaitlin's goal was to establish repeatable protocols for eliciting flights in insects large enough to carry a telemetry recoding chip to correlate flight kinematics, responses to optic flow stimuli, and muscle potentials (Harrison, 2011). She has since moved on to studying compressive sensing for her PhD but hopes to return to working on this starting in 2017.

A

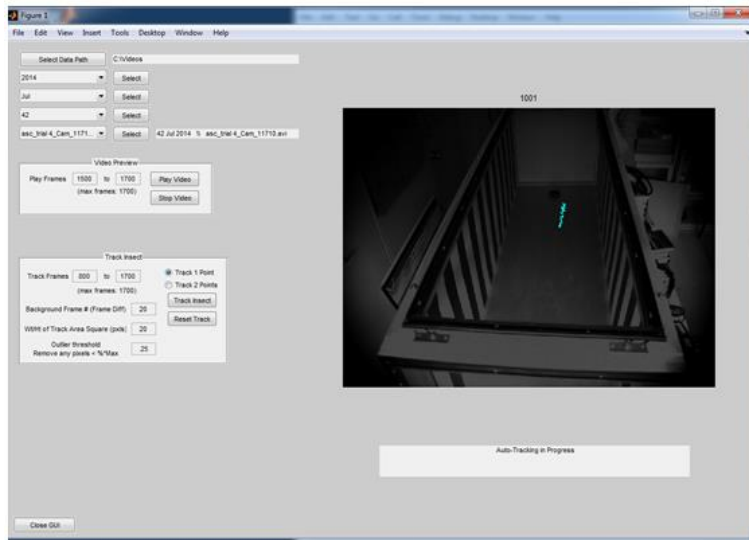

B

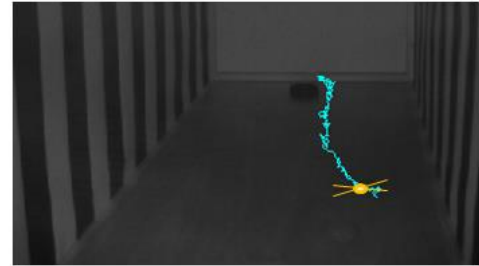


Figure 1. Early tracking results illustrating the difficulty in tracking a small, *not* highly contrasted, unmarked flying insect against a background with changing contrast in an automated (or semi-automated way). A) Screen capture of automated tracking program. B) Trajectory of tracked flying insect in one camera view.

Outdoor flight recordings have their own challenges, as illustrated in Figure 2. It is also likely that the objective of capturing completely natural kinematics is not being reached, because the insects are manipulated beforehand. Future efforts will move towards completely natural conditions, capturing flight from insects that have not experienced any interference from the research team.



Figure 2. Outdoor recording screenshot of local robberfly (Diogmites) after capture. Lighting conditions are challenging because of changing weather conditions. The sky is used as a background in an attempt to increase the contrast of the insect and background, The robberfly is directly above the release point in this screenshot.

Gaze stabilization is also of interest, but, as can be seen in Figure 1, the head of the insect is not easily discernable in free flight. In addition, it would be difficult to induce precise behaviors to induce a gaze stabilization response. Therefore, efforts were started toward characterizing gaze stabilization in insects while tethered. The stimulating is a rotating horizon line produced by UV and green LEDs (Figure 2).

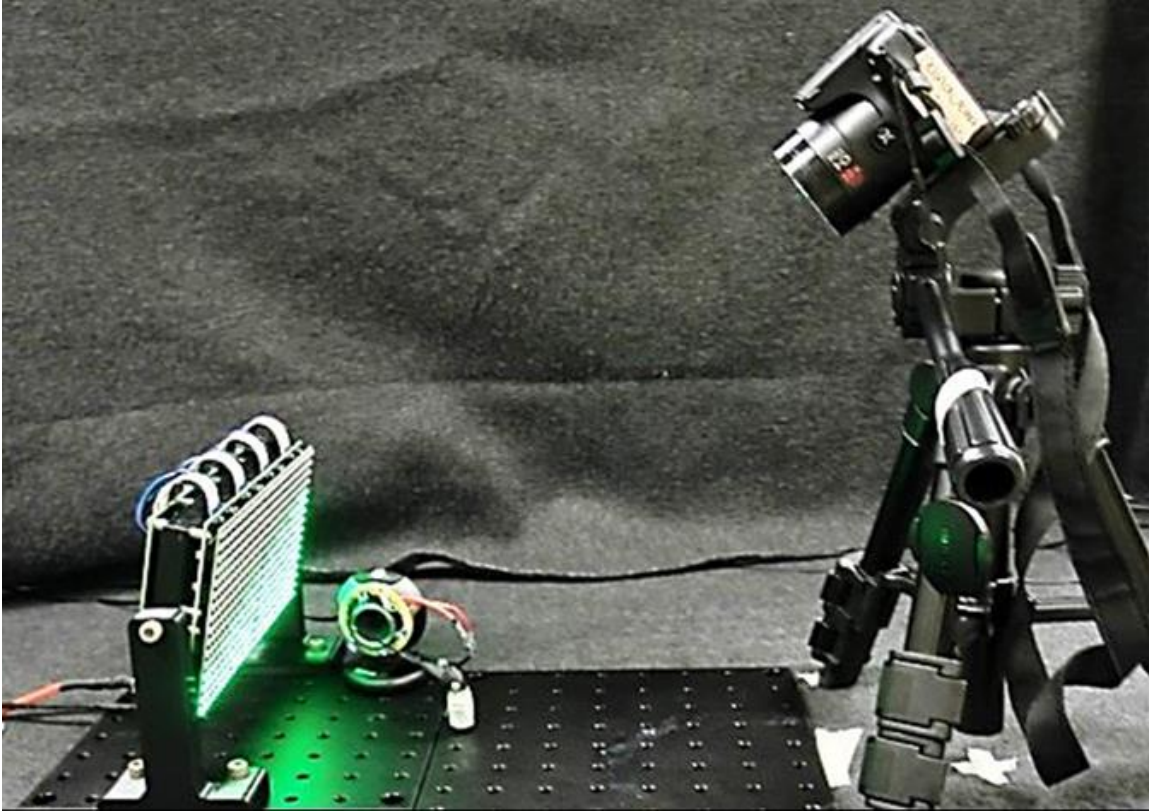


Figure 3. Damselfly gaze stabilization setup. Panel field of view = 45×22.5 degrees. Local species of damselflies, robberflies, and dragonflies have all been tested in this apparatus and have failed to respond with head rotations.

4.0 2015 ANNUAL REPORT

4.1 Stabilization of the head in flight

Blowflies stabilize in flight by moving their heads and bodies (Hengstenberg 1993). The visual system plays a role in this multi-sensory task. Previous work has shown that insects can reduce motion blur and maintain consistent visual perception by moving their head independently of their body by employing a head stabilization reflex which is a control loop that rolls the head with respect to the visual environment (Goulard et al 2015). This has been studied in honeybees (Boeddeker 2009), wasps (Viollet 2013), and flies (Krapp 2012) most often using an edge as visual stimulation to a tethered insect.

A projector dome with a field of view of 240 x 120 degrees (Figure 2) was used to stimulate tethered *Ischnura ramburii* damselflies (Figure 1). Early recordings used stimulation that was readily available—cityscapes that were already mapped onto the dome in correct perspective (Figure 3). In order to standardize responses, a horizon scene was built that could be rotated at a user-defined speed, transversing a user-defined angle (Figure 4).

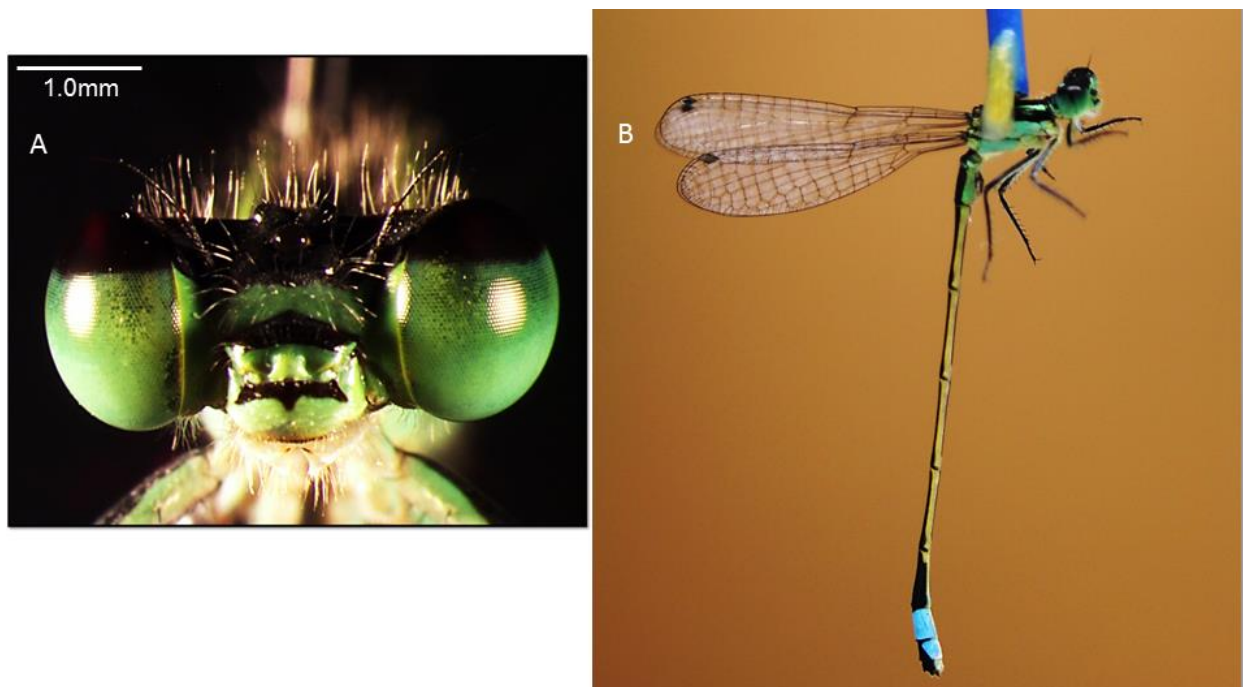


Figure 4. Head of a damselfly showing compound eyes and ocelli clearly. B) Tethered damselfly.



Figure 5. Visible wide field of view projector for stimulation of gaze stabilization response in insects. Field of view = 240 x 120 degrees.



Figure 6. Initial stimulation for damselflies in dome with field of view = 240 x 120 degrees.

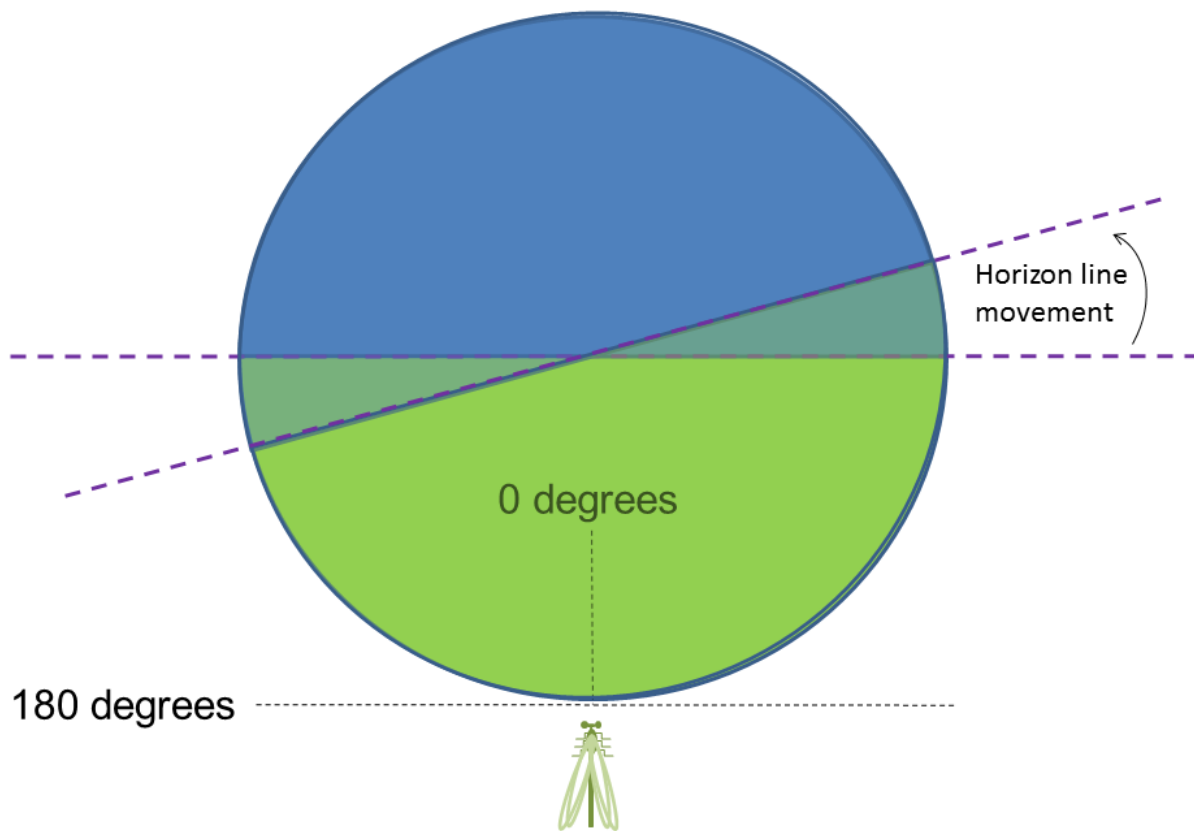


Figure 7. Designation of reference frame for visual stimulation.

The movement of the damselflies was recorded using high-speed cameras. Work is now ongoing to quantify the head rotation and body positions from the videos (Figure 5).

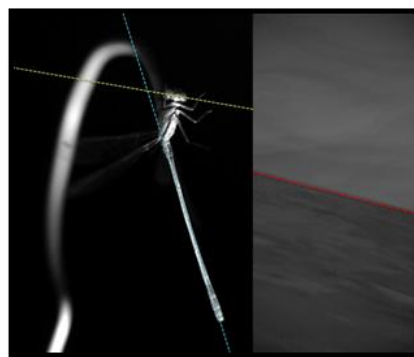


Figure 8. Tethered damselfly in the dome, screenshot of a high-speed recording. Lines illustrate desired measurements.

In 2015, we manipulated the bounds of the rotating horizon scene. We established at what angular extent a center disk that blacked out the center of the scene stopped the gaze stabilization response in a damselfly (Figure 6). Then we established the angular bound of blacking out cone in stopping a stabilization response (Figure 7). Combining these measurements, we tested a ring of rotating horizon to establish whether this could elicit a stabilization response (Figure 8). These experimental treatments were repeated for 14 damselflies of the same species (mixed gender) and the results were found to be consistent over individuals.

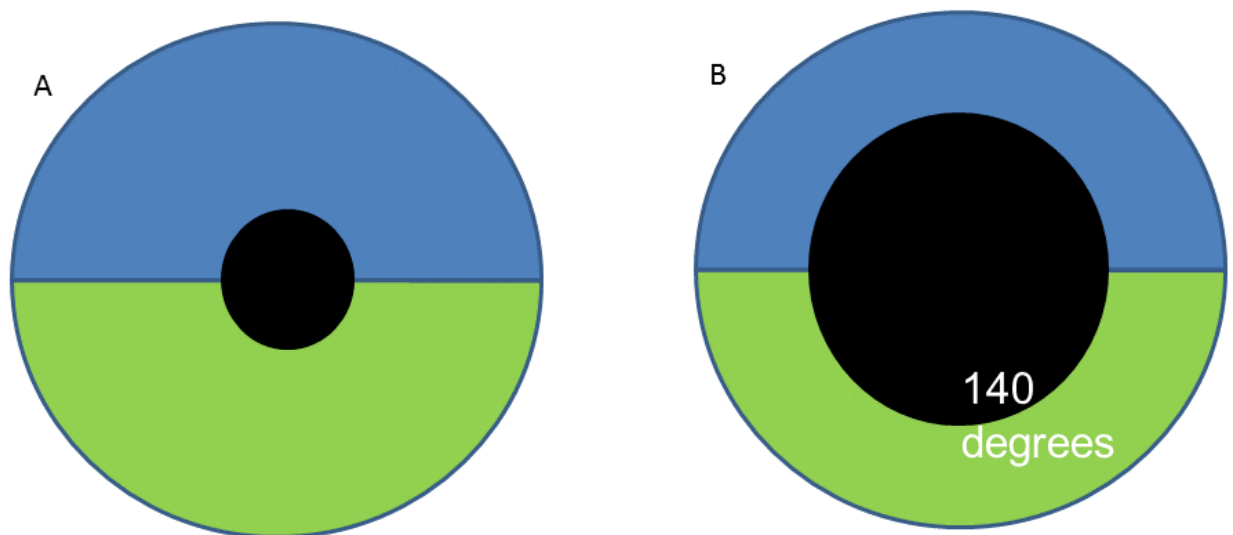


Figure 9. Radius of blacked-out center is enlarged until animal stops responding. A) Less than 140 degrees, animal still responds with head rotation. B) At radius of 140 degrees, animal stops responding. [not to scale]

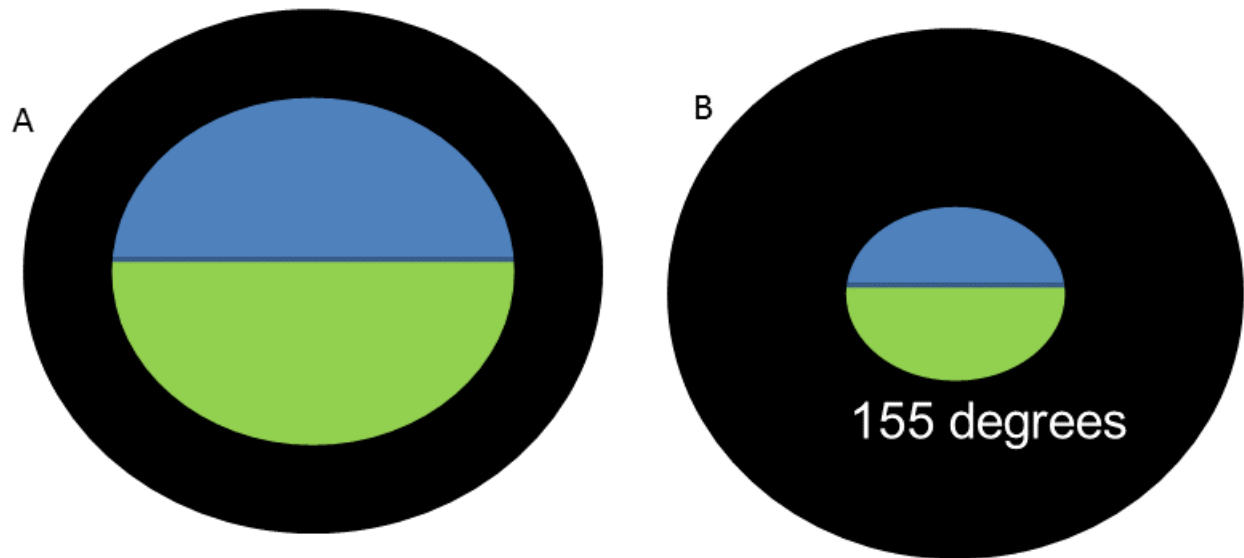


Figure 10. Radius of blacked-out “cone” is enlarged until animal stops responding. A) Greater than 155 degrees, animal still responds with head rotation. B) At radius of 155 degrees, animal stops responding.

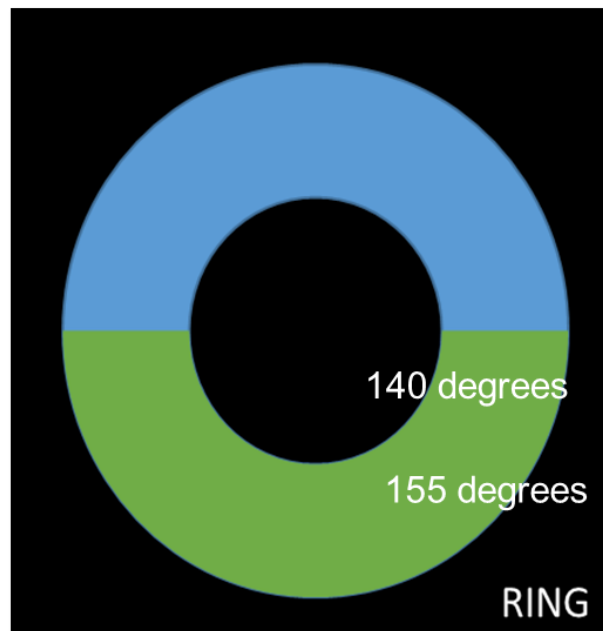


Figure 11. Ring of stimulation sufficient and necessary for head movement response to rotating horizon.

There are three hypotheses to explain the consistent response in Figure 8. First, the rotation the horizon undergoes in the center is different than at the edges of the dome (Figure 9A). At the edges of the dome, the horizon sweeps a larger area than in the center. This also means the horizon is rotating at a different speed at the edges of the dome than at the center. The damselflies could have a particular rotation extent or frequency that they respond to for stabilizing their gaze. Rotations above and below this frequency or extent would not elicit this response.

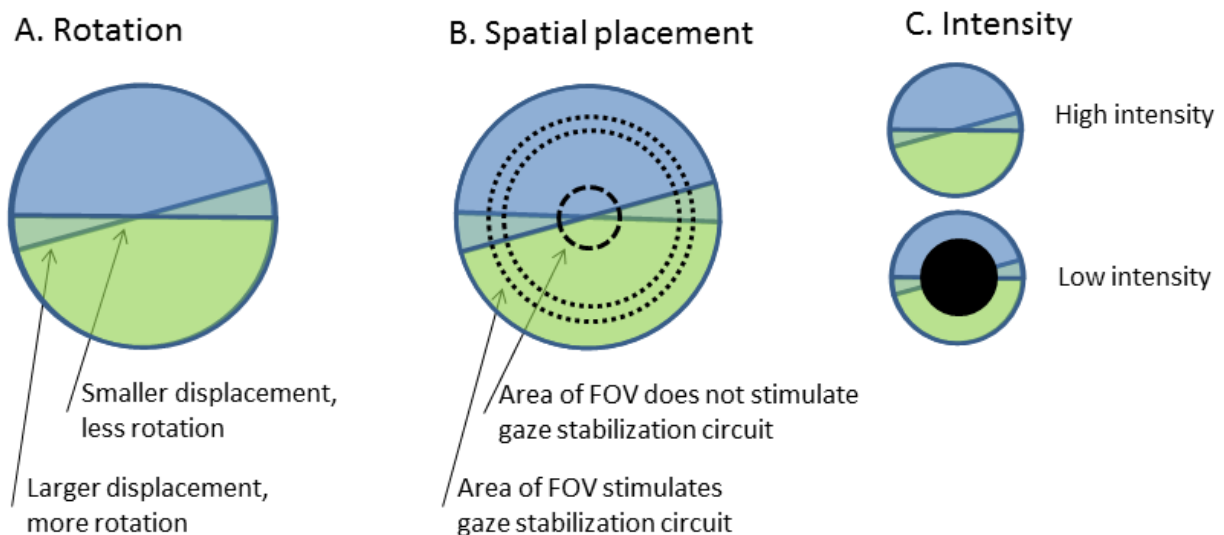


Figure 12. Hypotheses to explain behavioral response. A) Both the speed of the horizon and the spatial extent of the horizon movement change from the center to the edges. B) The field of view that stimulates the gaze stabilization circuit is in the periphery and not in the center. C) The intensity is decreased when areas are blacked out, and the animal stops responding when intensity is too low.

The second hypothesis to explain the response in Figure 8 is that the damselfly optical processing circuitry uses a portion of the field of view of the eyes for gaze stabilization (Figure 9B). The compartmentalization of this response might correspond to differences in the resolution of the compound eye. For example, the upward looking part of the compound eye might have increased resolution to look and track prey items while the periphery would be used to track large scale motion of the visual field and stabilize the visual sensors.

The third hypothesis to explain the response in Figure 8 would be that blacking out portions of the field of view reduces the overall intensity of stimulation to the eyes of the damselflies and therefore decreases the response accordingly (Figure 9C). The damselfly optical system would have a threshold of light needed to utilize their gaze stabilization

circuitry. It is possible that blacking out portions of the field of view reduces the light to levels below which the damselflies cannot respond to the moving horizon.

In 2016, these three hypotheses (Figure 9) were tested by manipulating the horizon scene in ways to eliminate these confounding explanations (Figure 10) for rotation, spatial placement, and intensity. In addition, the experiment was expanded to include the following:

- Determine behavioral response to vertical extent of stimulus.
- Determine behavioral response threshold to texture in scene.
- Spectral ERG of damselfly eyes, compound and ocellar.
- Alternatively occlude ocelli and compound eyes and perform behavior tests again.
- Test other insects for similar response:
 - Dragonflies
 - Robberflies, and
 - Relatives of the *Ischnura ramburii* damselfly.
- Measure the field of view of the compound eyes and ocelli.

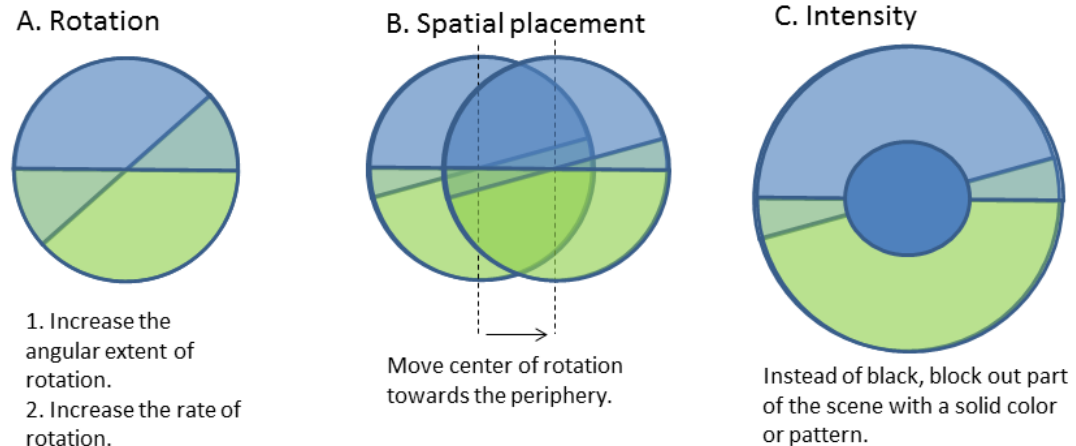


Figure 13. Testing hypotheses to explain behavioral response. A) Response zone will shift to match a particular rotation speed or spatial displacement of the horizon line. B) The field of view that stimulates the gaze stabilization circuit remains stable as center is shifted. C) The response zone will change size based on total intensity of the scene.

4.2 High-speed Recordings of Natural Flight during Very Low Light Conditions

High-speed recordings were attempted at night of natural flight near light collection setups (Figure 11). LED panels emitting light in the infrared were used on the ground pointing skyward next to a light sheet reflecting UV light. The hope was that the UV light would attract flying insects. The insects would fly through the infrared light from the LED panels in front of the high-speed cameras. We would then be able to record the natural flight of these insects without manipulating them. This proved to be challenging in execution and no usable flights were captured.



Figure 14. High-speed videography setup attempt at night collecting station.

4.3 Challenges to Auto-Tracking Insects

Automation saves an enormous amount of man hours therefore saving money. There are multiple challenges to tracking insects in video recordings:

- Dim light
- Complex backgrounds
- Small subjects
- Unmarked subjects
- Arbitrary camera angles, insect flies directly towards camera on focal axis

A summary of tracking efforts by Eglin so far include the use of Ty Hedrick's code. State of the art automated tracking software has been developed in Tyson Hedrick's lab. It is the field standard, and it is easy to use with markers and large specimens. It uses one-point tracking per specimen but can track multiple specimens. In-house code efforts were

started with David Forester (in-house contractor) and enabled basic, automated tracking for 2D of insects using two-point tracking. This was better than Hedrick's code of one-point tracking because it enabled us to obtain body axis measurements. David Forester took a job at another facility. Kaitlin Fair (government personnel) then expanded the user interface and contrast conditions for 2D tracking of insects. Kaitlin is now working on her PhD at Georgia Tech. David Richards (in-house contractor) has accomplished the calibration of multiple cameras (based on Ty Hedrick's code), combined multiple 2D for 3D coordinates of insects. He has also compared Trevor Wardill's code developed to track killer flies in small, brightly lit space at Oxford. David Richards has also utilized a simulation to compare different methods for accuracy; this simulation is called IRMA. IRMA is a simulation tool designed in-house, and development continues via contractors. It slows construction of imagery/movies of scenarios for different sensors using a visible static camera as sensor. The scene built by David Richards consists of a floor and tabletop along with a moving, 1 cm cube that represents the flying insect (Figure 12).

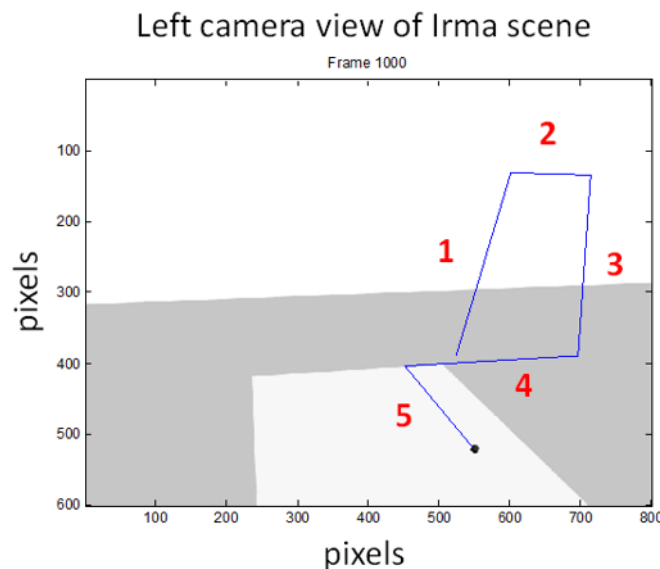


Figure 15. The scene consists of a floor and tabletop along with a moving, 1 cm cube which represents the flying insect. The cube's trajectory consists of 5, 200-frame segments.

Three sources of error have been identified in auto-tracked trajectories including quantization error, localization error, and data association error (Figure 13). Ty Hedrick tested quantization error with different camera positions in simulation (Therault, 2014). Tested localization error by adding noise in simulation. Tested data association error in hardware testing by throwing an object and using gravity and mass to check. They state their error as being less than body length of a bat and half the body length of a bird. This would be several body lengths of an insect. For insects, especially when looking at accelerations where errors are integrated twice, a goal would be to reduce the error.

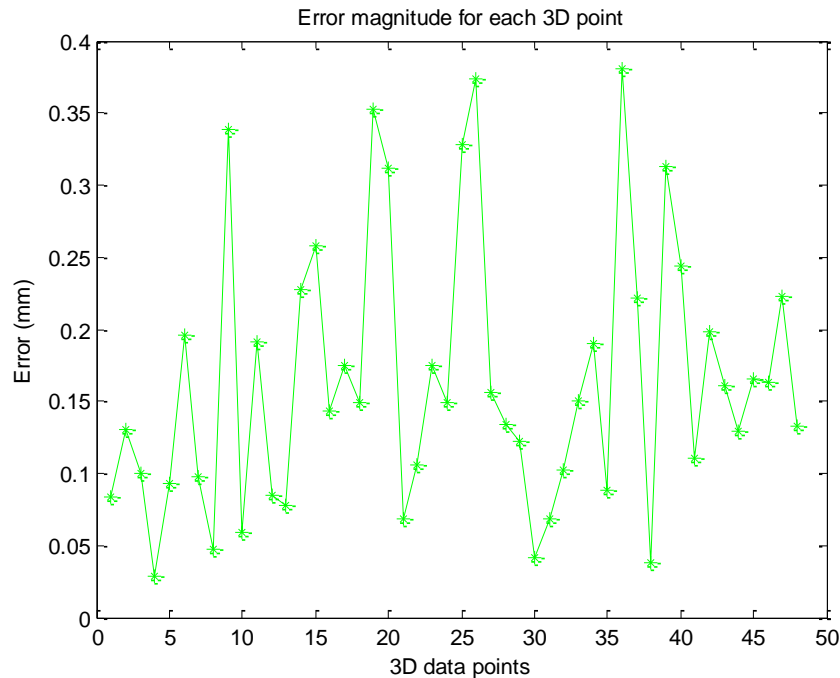


Figure 16. Graphical Calibration Error Results

Using IRMA confirms error estimated looking at different camera positions and adding noise. The goal would be to explore when and how different algorithms fail, and examples would be multiple moving objects, moving object and moving background, and/or background changing contrasts. Also, we would like to explore observation distance, pixels on target, and measure position error. We question whether it would be possible to define a requirement for maximum observation distance and minimum pixels on target to obtain an acceptable position error (Figure 12).

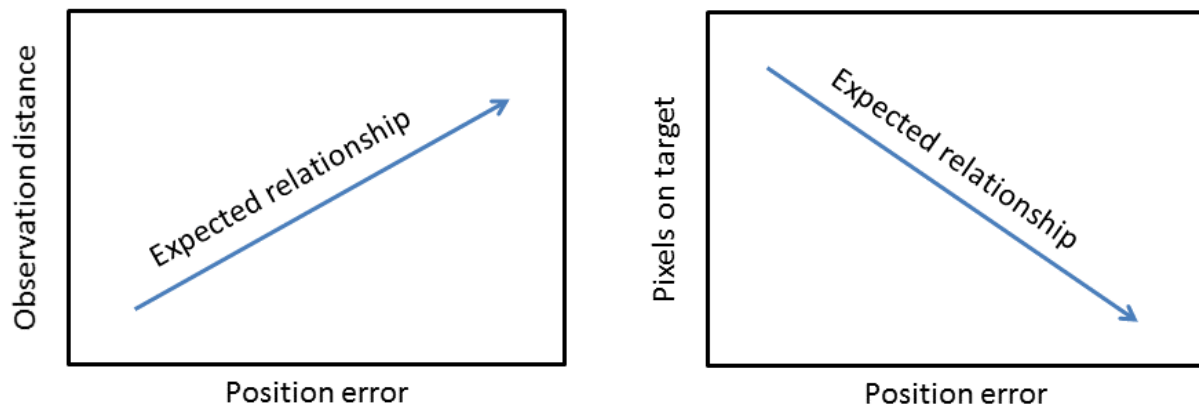


Figure 17. Projected relationships between position error (measured) and observation distance and pixels on target (user defined).

5.0 2016 ANNUAL REPORT

5.1 Outdoor Completely Natural Flight Capture



Figure 18. Natural outdoor flight recording setup

Multiple completely natural high-speed recordings of flying insects were attempted (Figure 1). We chose to focus on damselflies to complement the gaze stabilization work (Figure 2). It would be useful to tether insects at a natural body angle, but this element is not yet known. A screenshot of one of these recordings illustrates the challenges faced by auto-tracking algorithms (Figure 2). The damselflies do not always present a high contrast to the background. The background is also being moved by the wind and is not constant. We are still working on automating the tracking of insects in these natural conditions (Figure 3).



Figure 19. Damselflies in natural flight outdoors with complex and changing background due to wind. Screenshot of high-speed recording.

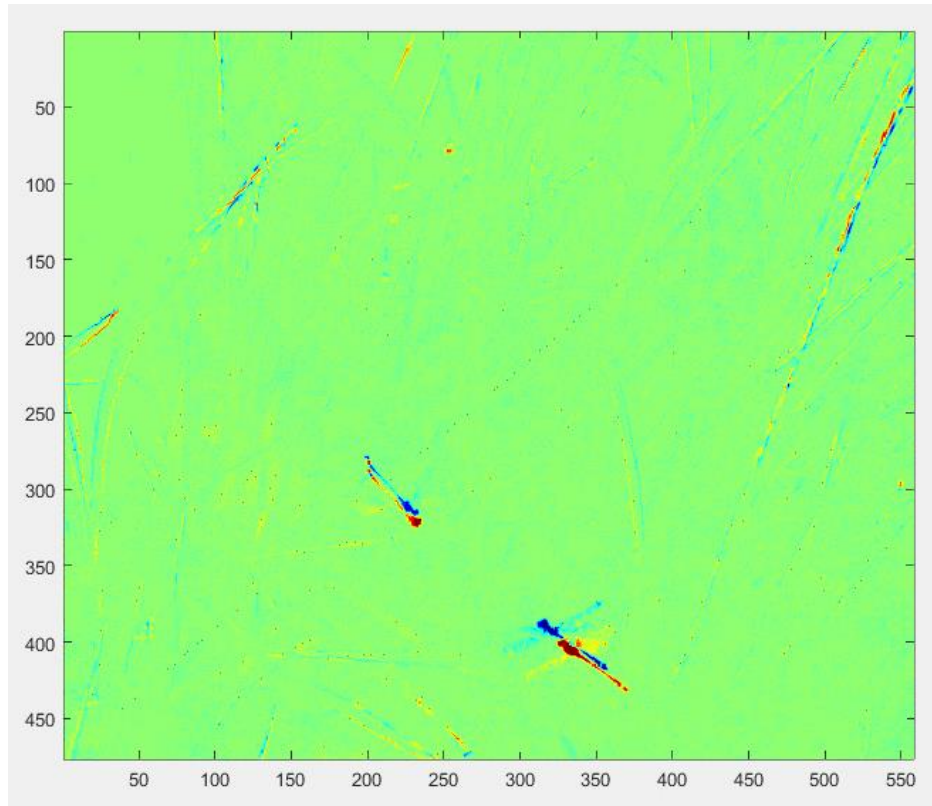


Figure 20. Auto-tracking example of outside flight recordings of damselflies. Movement over five frames. The blue is where the insect is now; red is where it was five frames ago.

5.2 Gaze Stabilization of Tethered Damselflies

For technical reasons, we chose to test the intensity hypothesis to explain the gaze stabilization response found in 2015. Teal would be used, instead of black, to block out portions of the field of view of tethered damselflies and the angular position of these bounds noted when the damselflies stopped responding with stabilization movements (Figure 4). This would either increase the intensity or leave it unchanged. However, the dome material was changed because the old fabric was tearing and the projection system updated and recalibrated. The damselflies did not respond to the new system. We switched to the old fabric but were unable to switch to the old projection system. We therefore needed to try to repeat 2015 experiments in addition to the teal bounds. We successfully obtained five individuals that would respond to the horizon with stabilization movements, but the results were not the same as last year (Table 1). Instead of a ring of stimulus resulting, the bounds of the disk and cone overlap. Further testing is required before these results can be interpreted.

Table 1. Degree responses of individuals tested with black and teal bounds.

	Black Bounds		Teal Bounds	
Specimen	Cone	Disk	Cone	Disk
1	130	100	110	130
2	110	90	90	120
3	110	90	110	110
4	120	90	120	110
5	120	90	130	90

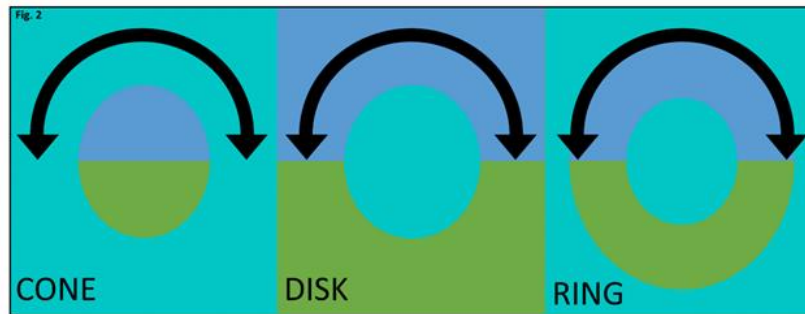


Figure 21. Dome visual stimulation for damselflies. Teal is used to block out the rotating horizon line.

5.3 Electrophysiology (ERG) of Damselfly

ERGs are field potential recordings from the eyes. In the damselflies, we recorded from the compound eyes. The stimulation is a xenon light lamp producing light from the UV to near IR wavelengths. A monochromator and neutral density filters allow the same number of photons to be selected at a particular wavelength to be used as spot stimulation onto the eye. An electrode in the eye is used to record the voltage response. The voltage response is then compared to a baseline, and the on/off responses are measured (Figure 5). In addition, a green LED is used between every wavelength measurement to assess the accommodation of fatigue of the individual under study.

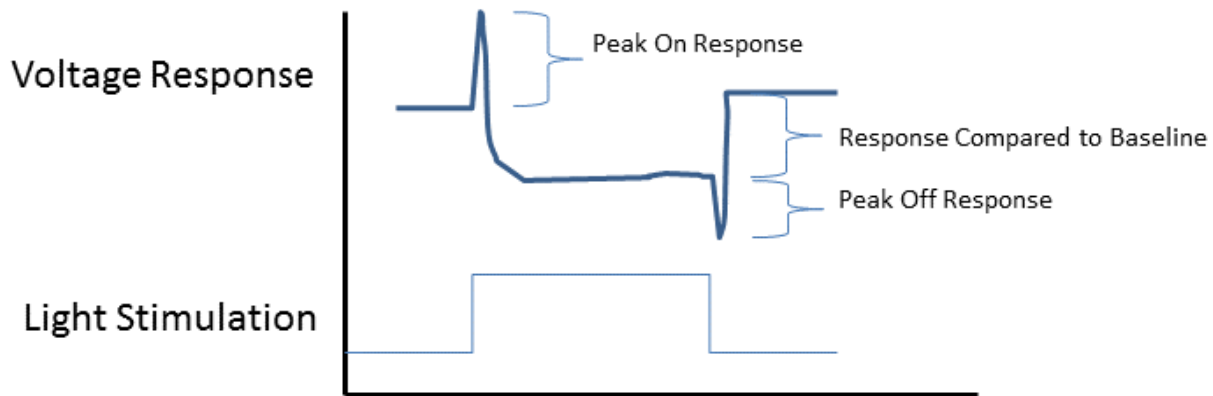


Figure 22. Analysis of voltage response using electroretinography recording of damselfly compound eye.

An ERG of the damselfly illustrates that it is sensitive to most of the visible spectrum in addition to UV (Figure 6 left-hand panels). The green LED does not illicit a consistently decreasing response over experimental time (Figure 6 right-hand panels), and therefore we can conclude that the spectral response is not confounded with accommodation or fatigue of the insect. The strength of the response in red was what we were hoping to find. The KHILS dome has a strong red component to the horizon scene in the ground (Figure 7). In the future, it would be useful to look for spectral differences as a function of location in the eye, e.g., dorsal vs. ventral. Future testing would also include testing linear polarization sensitivity as a function of location in the eye.

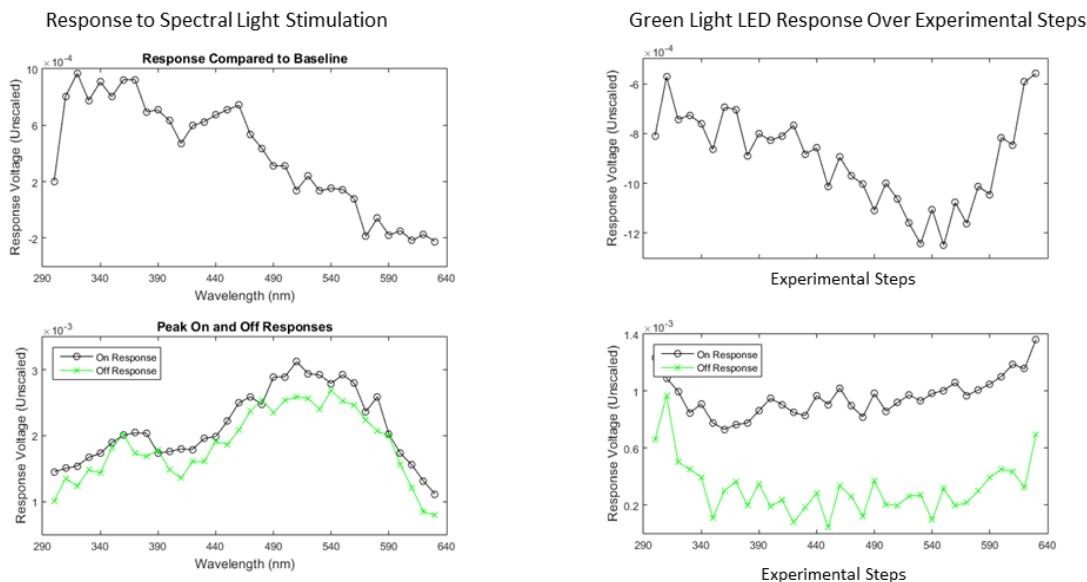


Figure 23. ERG recordings from the damselfly to spectral light in addition to a green LED. One green light LED recording was taken after each spectral measurement.

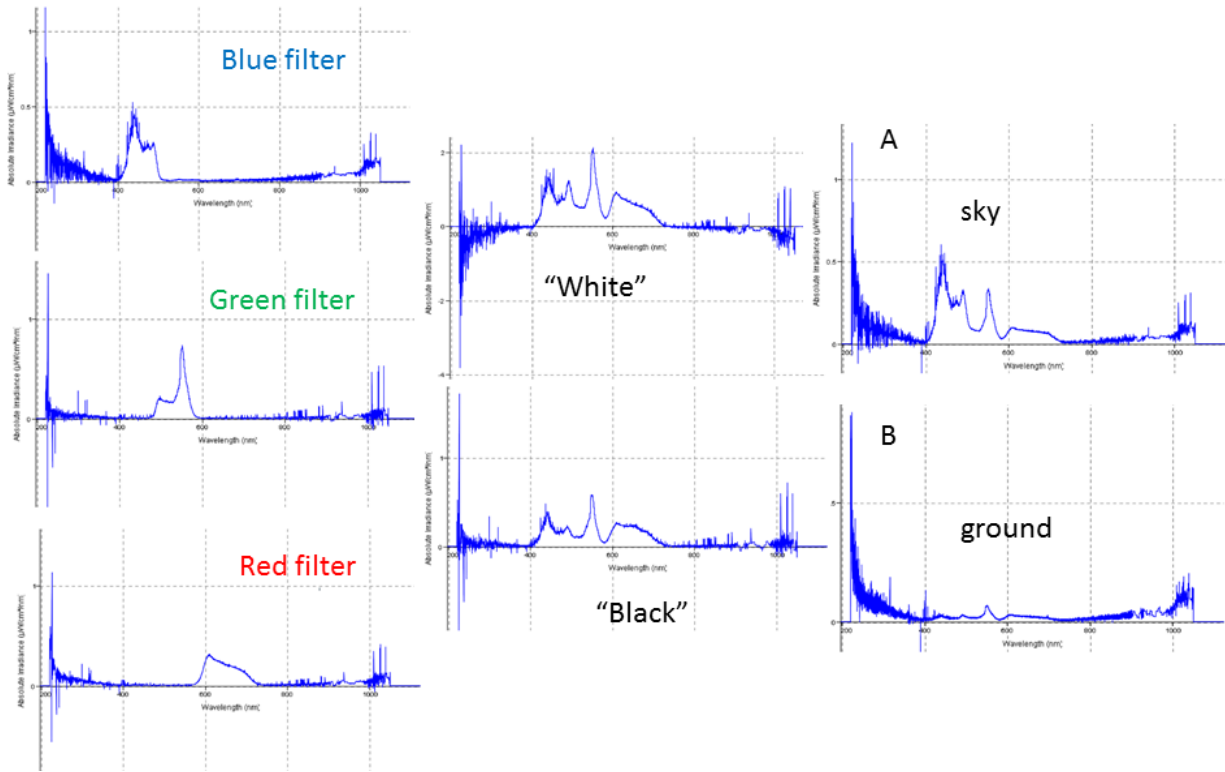


Figure 24. KHILS Projector Spectral Characteristics. A) Ocean spectrometer measurement of the projected sky in KHILS bio-dome. B) Ocean spectrometer measurement of the projected ground in KHILS bio-dome.

5.4 Compound Eye Resolution of Damselfly

Attempted measurements using a highly automated goniometer instrument called FACETS (Douglass 2016) showed some change in facet size over the compound eye of a damselfly (Figure 8). In the future, when measurements are complete, we will use them to make a 3D model (lens size and 3D position). That model will then: 1) map the compound eye to KHILS dome and know where each facet is looking, 2) project what each facet actually sees, and 3) allow us to project selectively to each facet.

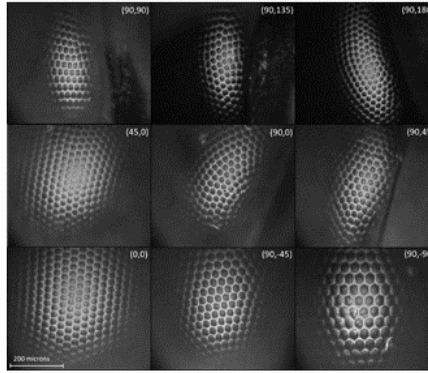


Figure 25. Measure ommatidial lens array with FACETS.

6.0 REFERENCES

- Boeddeker, Norbert, and Jan M. Hemmi. "Visual gaze control during peering flight manoeuvres in honeybees." *Proceedings of the Royal Society of London B: Biological Sciences* (2009): rspb20091928.
- Douglass, J. K. (2016). Rapid mapping of compound eye visual sampling parameters with FACETS, a highly automated wide-field goniometer. *Journal of Comparative Physiology A* (, 1-13.
- Goulard, Roman, et al. "Behavioural evidence for a visual and proprioceptive control of head roll in hoverflies (*Episyrphus balteatus*).*" Journal of Experimental Biology* 218.23 (2015): 3777-3787.
- Harrison, R. R. (2011). Wireless neural/EMG telemetry systems for small freely moving animals. *IEEE transactions on biomedical circuits and systems*, 103-111.
- Hedrick, T. L. (2008). Software techniques for two- and three-dimensional kinematic measurements of biological and biomimetic systems. *Bioinspiration & biomimetics*, 034001.
- Hengstenberg, Roland. "Multisensory control in insect oculomotor systems." *Rev Oculomot Res* 5 (1993): 285-298.
- Krapp, Holger G. *Multisensory Control of Stabilization Reflexes*. Imperial Coll of Science and Technology London (United Kingdom), 2012.
- Theriault, D. H. (2014). A protocol and calibration method for accurate multi-camera field videography. *Journal of Experimental Biology*, 100529.
- Viollet, Stéphane, and Jochen Zeil. "Feed-forward and visual feedback control of head roll orientation in wasps (*Polistes humilis*, Vespidae, Hymenoptera)." *The Journal of experimental biology* 216.7 (2013): 1280-1291.